REAR FLOOR SIDE PANEL (ASSY)



F25920A

With the body lower back panel removed.

Symbol meaning

REMOVAL	▲O ▲M ▲I : Remove Weld Points
INSTALLATION	●I : Spot Weld ○O M I : MIG Plug Weld

F25920B

REMOVAL·INSTALLATION

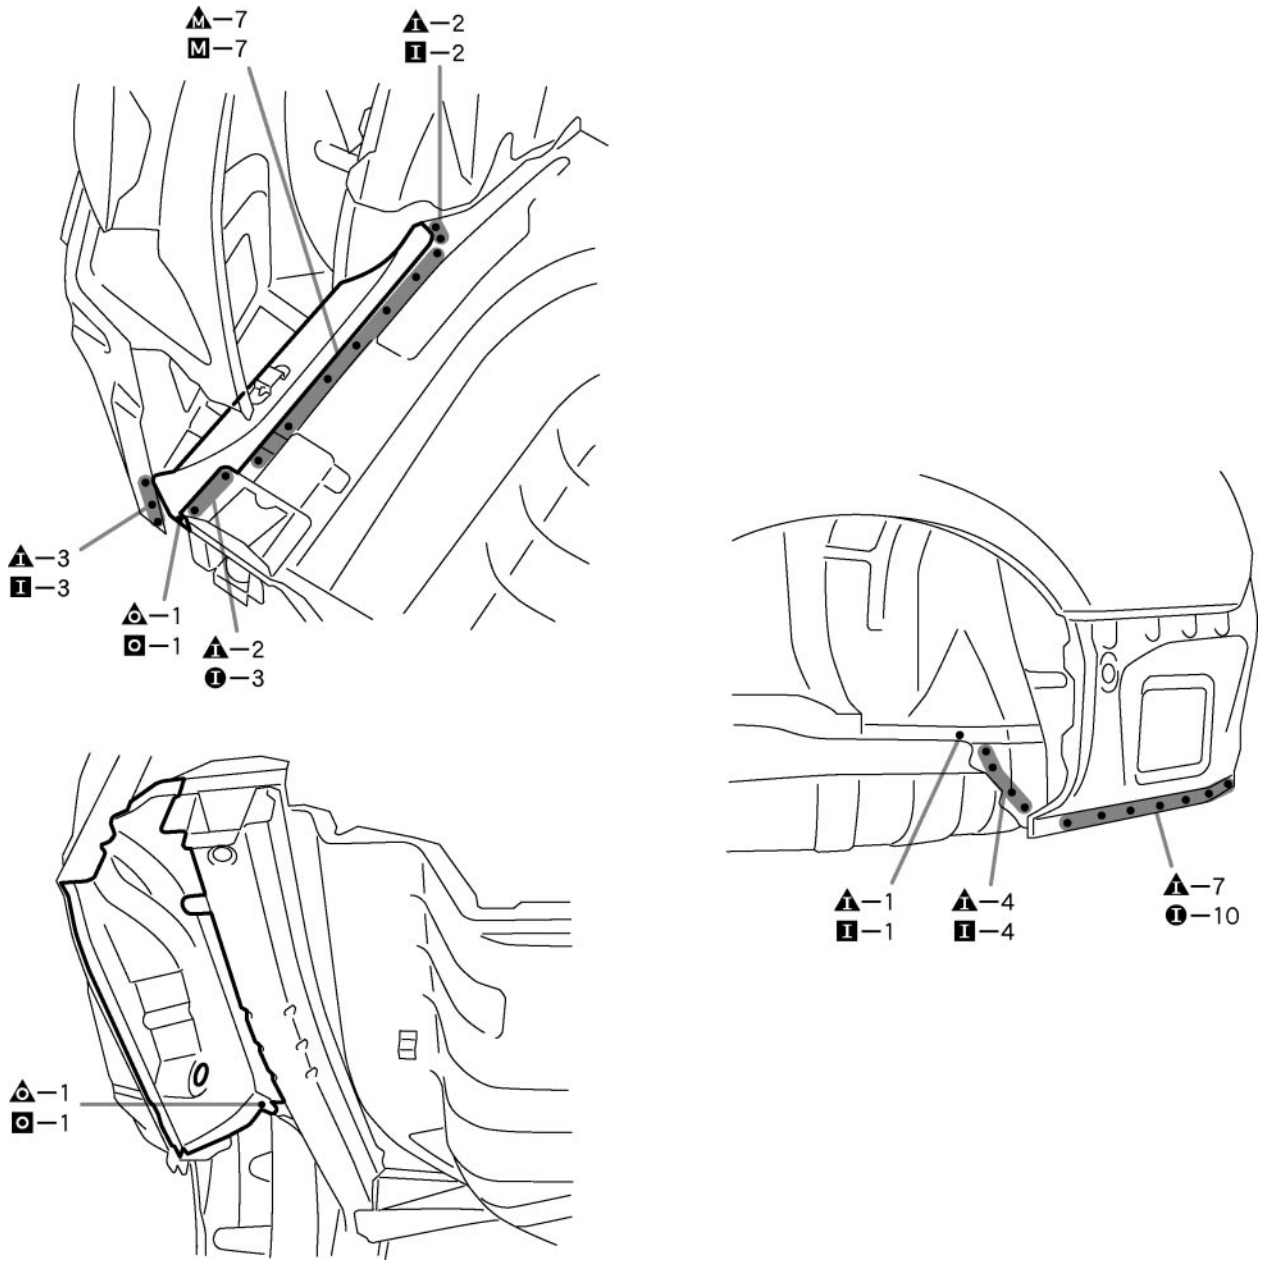

F25920

INSTALLATION POINT

1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

Symbol meaning

REMOVAL	A M A : Remove Weld Points
INSTALLATION	I : Spot Weld O M I : MIG Plug Weld

F25920B

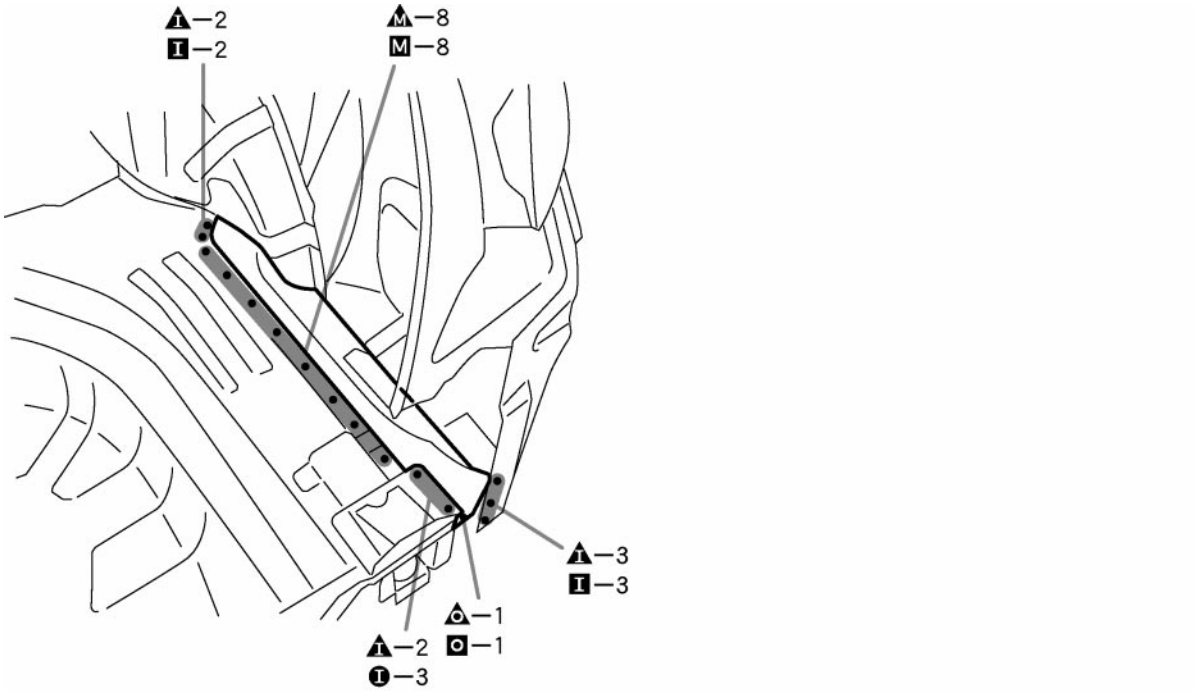

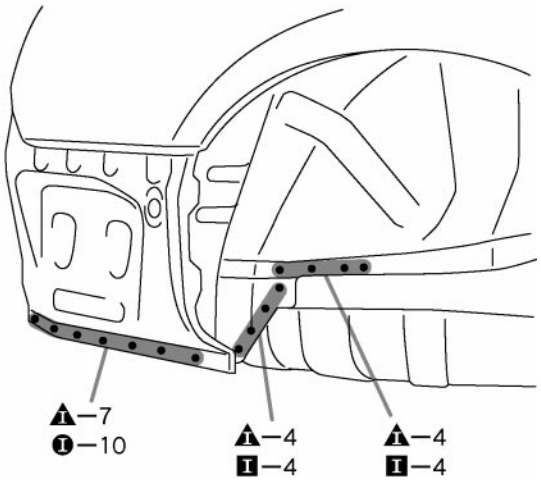

F25921

INSTALLATION POINT

1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)

2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.